



**ASAHI
PENTAX**

90° MIRROR ADAPTOR

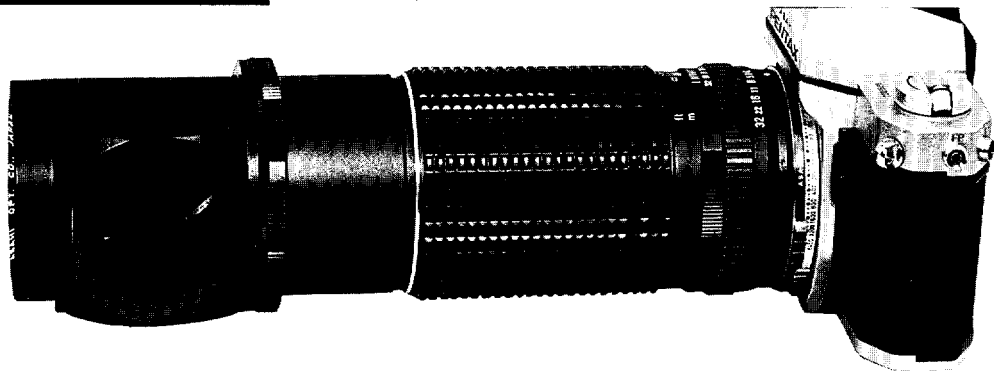


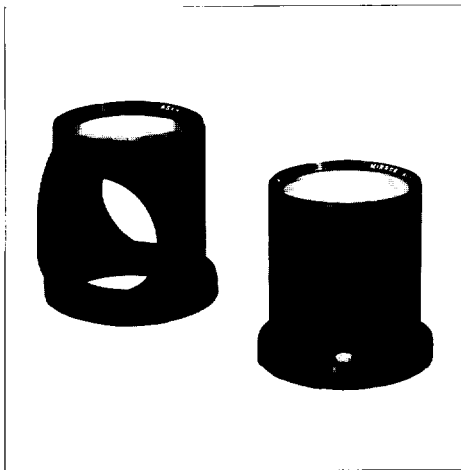


Candid or Clandestine Photography

The Pentax 90° Mirror Adaptor works by means of the 45° reflex mirror which is inside it. This mirror directs the image which enters through a round window on the side of the adaptor onto the front of the master lens on the camera. Thus what is at a 90° angle to the front of the camera is actually what is seen in the viewfinder. (On the front of the Adaptor is a dummy lens front to give a realistic appearance to the camera.) Since the camera is never directed toward the subject, he is naturally never aware he is being photographed. The Adaptor has a clamp screw for exact positioning of the round window.

Mounting the Mirror Adaptor

The Adaptor can be screwed onto the front part of the following lenses: SMC Pentax 200mm f/4, SMC Takumar 200mm f/4, Super Takumar 200mm f/4, Takumar 200mm f/3.5 and Tele-Takumar 300mm f/6.3. To attach the Mirror Adaptor, screw it into the 58mm diameter filter thread of the lens. The 58–67mm diameter auxiliary ring (shown in the picture) is required when attaching the Adaptor to lenses with larger filter-thread diameters, such as the Takumar 200mm f/3.5.

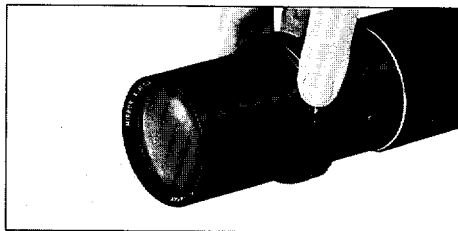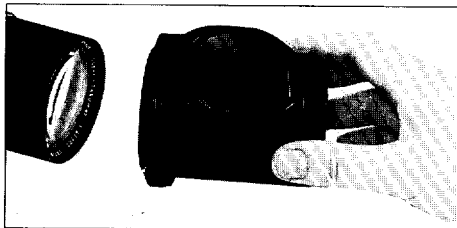



ASAHI OPTICAL CO., LTD. C.P.O. 895, Tokyo 100-91, JAPAN
ASAHI OPTICAL EUROPE N.V., Weiveldlaan 3-5, 1930 Zaventem, BELGIUM
ASAHI OPTICAL EUROPE S.A. (Hamburg Office) 2000 Hamburg 54 (Lokstedt), Grandweg 64, WEST GERMANY
ASAHI OPTICAL (AMERICA) INC. 15 East 26th Street, Suite 1710, New York, New York 10010, U.S.A.
ASAHI OPTICAL BRASILEIRA IND. E COM. LTDA. Rua Estados Unidos, 1053, São Paulo, SP, BRASIL

06881

Printed in Japan

Exposure Determination


Although the image seen through the viewfinder of your Pentax camera, when outfitted with this Adaptor, is vertically correct, it is reversed left-to-right as in the case of the twin-lens reflex camera. When using this Adaptor, the maximum aperture of the lens becomes $f/5.6$. Even when the diaphragm is set at $f/3.5$ or $f/4$, its actual aperture stays at $f/5.6$. However, when you use any Pentax camera


provided with Through-The-Lens metering capability (including the entire K Series and S Series), you need not worry about exposure determination. The camera will provide accurate information in spite of any variations caused by the Adaptor.

If you wish to use a filter, screw it onto the lens before attaching the Adaptor. The Mirror Adaptor serves as its own lens shade.

PENTAX

三ツ星アダプターIII
910 MIRROR ADAPTOR III

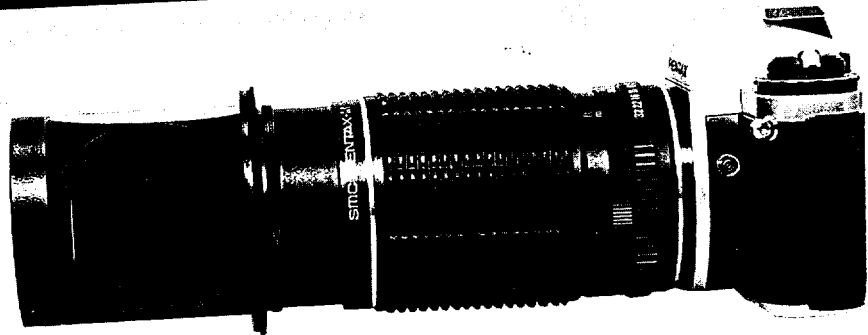


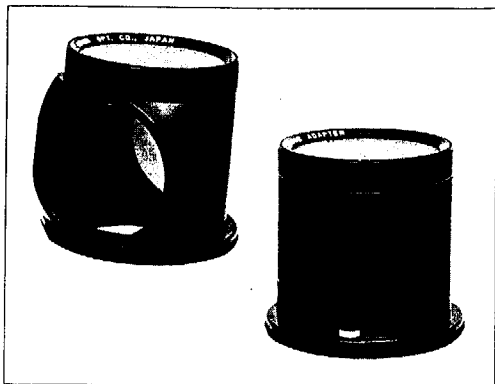

Pointers for Effective Use

1. When a 200mm F4 lens is used with the adaptor, the effective maximum f-number is F5.6, even though the lens specifies F4. However, always make it a point to stop the lens down manually to at least F5.6 with this particular lens to avoid depth-of-field loss.
2. When you use any Pentax camera provided with Through-The-Lens metering capability, you need not worry about exposure determination. The camera will provide accurate information in spite of any variations caused by the Adaptor.
3. With the exception of the polarizing filter, filters are screwed directly onto the master lens between the lens and the adaptor.
4. Locating the subject will be somewhat difficult at first when using the Mirror Adaptor because the image is laterally reversed. With a little practice, however, this will become easy.
5. The adaptor may also be used with lenses produced by other manufacturers, provided these meet with the focal length, filter size and f-number specifications of the Pentax and Takumar lenses listed in this booklet.

2

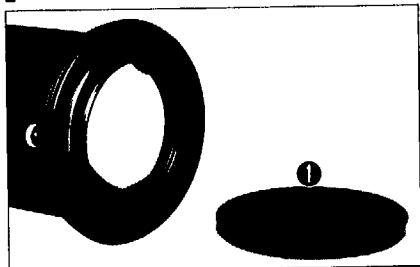

Mounting

Fig. 2 Remove the rear cap ① of the adaptor. With lenses having 58mm and 49mm filter threads, match the appropriate threads of the adaptor with the threads in the lens, and screw it into place.

3

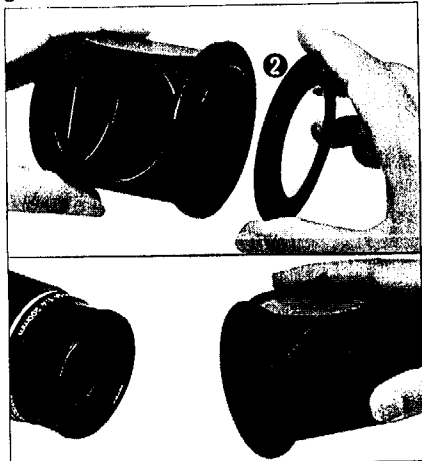


Fig. 3 With lenses having 52mm filter threads, remove the accessory ring ② of the adaptor by unscrewing it counterclockwise, as illustrated. Then, screw the newly exposed 52mm threads of the adaptor into the lens. (Keep the ring nearby when detached to avoid losing it; be sure to screw it back into place after using the adaptor.)

4



Fig. 4 Loosen the adaptor clamp screw ③ as shown in order to position the porthole at the desired shooting angle. Retighten the screw after the porthole has been adjusted as desired.

90° Mirror Adaptor II is a handy adaptor unit which was designed to enable candid photography with Pentax and Takumar lenses in the 135mm — 200mm telephoto range. It screws into the front filter threads of the lens in use and is equipped for use with 49mm, 52mm and 58mm filter sizes.

At the front of the adaptor is a dummy lens which gives the outward appearance that the photographer is shooting in the normal manner. However, the actual image being photographed is located at a 90° angle to the front of the camera and is relayed to the master lens through a porthole on the side of the adaptor via a 45° reflex mirror which is housed inside it. As the porthole also rotates on a full 360° arch, it not only enables the photographer to shoot subjects to his right and left, but also above and below him. The image appears vertically correct in the viewfinder and at the film plane, but it is reversed from left to right. This is corrected by reverse printing at the time of enlarging.

Specifications:

Size: 70mm (max. dia.) x 74.5mm length
(excluding mount)

Weight: 202 grams: (7 ozs.)

Specified Lenses:

SMC PENTAX M 200mm F4
SMC PENTAX 200mm F4
SMC TAKUMAR 200mm F4
SUPER TAKUMAR 200mm F4
SMC PENTAX M 150mm F3.5
SMC PENTAX 150mm F4
SMC TAKUMAR 150mm F4
SUPER TAKUMAR 150mm F4
SMC PENTAX M 135mm F3.5
SMC PENTAX 135mm F3.5
SMC TAKUMAR 135mm F3.5
SUPER TAKUMAR 135mm F3.5



Asahi Optical Co., Ltd. C.P.O. 895, Tokyo 100-91, JAPAN
 Asahi Optical Europe N.V. Weveldlaan 3-5, 1930 Zaventem Zuid-7, BELGIUM
 Pentax Handelsgesellschaft mbH. 2000 Hamburg 54 (Lokstedt), Grandweg 64, WEST GERMANY
 Pentax Corporation 35 Inverness Drive East, Englewood, Colorado 80112, U.S.A.
 Pentax Canada Inc. 1760 West 3rd Avenue, Vancouver, B.C. V6J 1K5, CANADA
 Pentax U.K. Limited Pentax House, South Hill Avenue, South Harrow, Middlesex HA2 0LT, U.K.
 Asahi Optical Brasileira Ind. e Com. Ltda. Rua Estados Unidos, 1053, São Paulo-SP, BRASIL

06371

8/81 Printed in Japan



旭光学工業株式会社

●174 東京都板橋区前野町2丁目36番9号 (960)5151(代)

旭光学商事株式会社

●100 東京都千代田区永田町1丁目11番1号 (580)2051(代)

●お問い合わせは各サービスセンターへ

- | | | | |
|---------|------|------------------------|---------------------|
| 東京 | ●104 | 東京都中央区銀座西8丁目10番地 | ☎ 03(571)5621(代) |
| 札幌 | ●060 | 札幌市中央区南大通り西11丁目4番27号 | ☎ 011(241)8742(代) |
| 仙台 | ●980 | 仙台市中央2丁目2番10号 仙都会館 | ☎ 0222(61)5681(代) |
| 横浜 | ●231 | 横浜市中区不老町1丁目4番6号 東明ビル | ☎ 045(681)8771(代) |
| 名古屋 | ●461 | 名古屋市中区泉1丁目19番8号 | ☎ 052(962)5331(代) |
| 大阪 | ●542 | 大阪府南区塩田道2丁目1番地 | ☎ 06(271)7991(代) |
| 広島 | ●730 | 広島市中区中町8番12号 広島グリーンビル | ☎ 0822(48)4321(代) |
| 福岡 | ●810 | 福岡市博多区中洲中島町3番8号 | ☎ 092(281)6868(代) |
| 新潟 | ●951 | 新潟市本町通七番町1153番地 東南第一ビル | ☎ 0252(24)8391(代) |
| 静岡 | ●420 | 静岡市伝馬町24番2号 住友建設ビル | ☎ 0542(55)6308(代) |
| 金沢 | ●920 | 金沢市尾張町2丁目8番23号 太陽生命ビル | ☎ 0762(22)0501(代) |
| 高松 | ●760 | 高松市鍛冶町6番地12 地田ビル | ☎ 0878(21)7650(代) |
| ●消費者相談室 | ●104 | 東京都中央区銀座西8丁目10番地 | ☎ 03(572)6479 |

☆記載内容の仕様などの一部が変更される場合があります。

02-8108